


BOSCHERT

**Deburring
Machine**

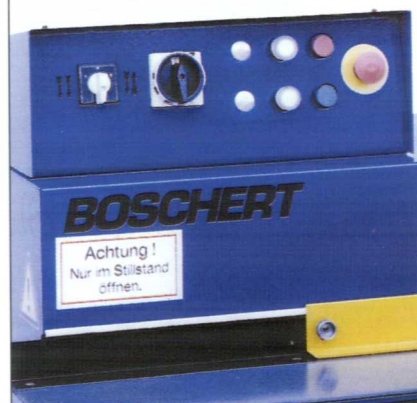

**Typ K2
Typ K3**

Concept of the machine

With the twin deburring design is the deburring time cut into half. The upper and lower side will be deburred in only period of work.

Superb for edge deburring.

A safe use on every workbench is possible as a result of the heavy design. You can also have a cabinet as an option. The penetration depth of the brushes can be adjust with one handle.

We guarantee:

- clear deburring of the edges
- no damage on the surface
- high service life of the brushes

A hold-down is responsible for a calm and safe running up to the max. thickness from the sheet of 8 mm (3/8").

The machine is maintenance free.

The brushes


Usual commercial brushes with standard dimensions are used. The brushes are protected through the restrict penetration

depth. This guarantees a high service life for the delivered special brushes.

Our types



- For the deburring of straight edges

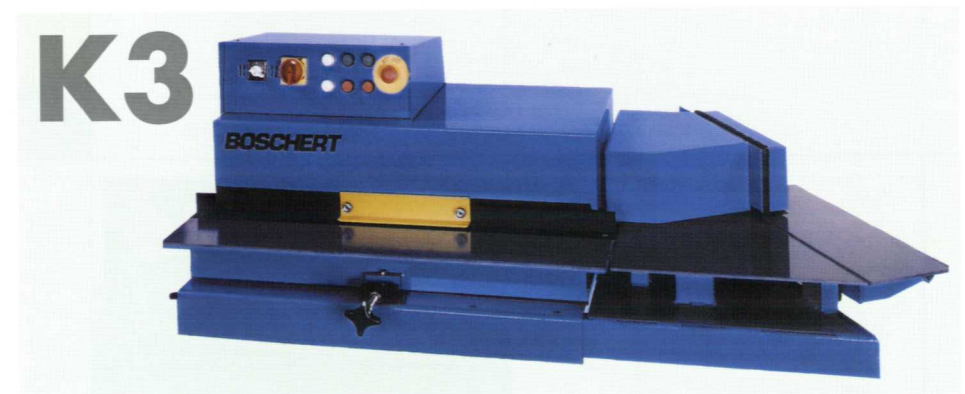

- For the deburring of straight edges and additional for radius and small partial sections at the outside edges of the sheets.

Technical Data	K2	K3
Engine output:	2x 2 KVA, 400 V	3x 2 KVA
Equipment of the brushes:	2 brushes, 300mm (12")	2 brushes, 300mm (12")
Dimensions:	1000 x 700 x 600 mm	1700 x 700 x 600 mm
Weight	approx. 120 kg	approx. 150 kg
Option: you can also have both machines with a robust undercarriage		



BOSCHERT

GmbH+Co.KG
D-79523 Lörrach, Postfach 7042
Germany
Telefon (07621) 95 93-0
Telefax (07621) 55 184
Mail: infoak@boschert.de